



COMBiLiFT


Customized Handling Solutions

C10,000 GT

making short work of long loads



The C10,000 GT can operate outdoor on semi-rough terrain as well as indoors.

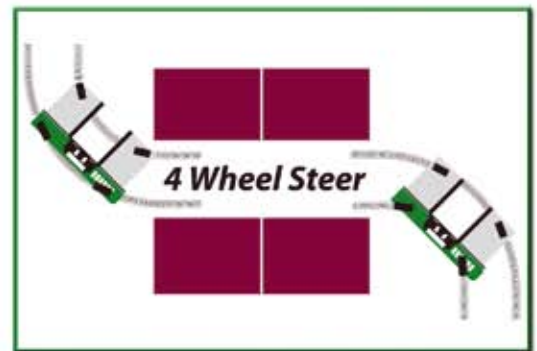

indoor outdoor narrow aisle solutions




www.COMBiLiFT.COM



SPECIFICATIONS

Model C10,000 GT

REF	DESCRIPTION	24"	30"	36"	42"	48"	54"	60"
1a	Lift Height	248"	248"	248"	248"	248"	248"	248"
1b	Free Lift Height	104"	104"	104"	104"	104"	104"	104"
2	Height Mast Closed	157"	157"	157"	157"	157"	157"	157"
3	Max.(Mast raised)	303"	303"	303"	303"	303"	303"	303"
4	Overall Length	54"	60"	66"	72"	78"	84"	90"
5	Mast Travel	26"	32"	38"	44"	50"	56"	62"
6	Ground Clearance Under Mast	5"	5"	5"	5"	5"	5"	5"
7	Ground Clearance to Centre of Wheelbase	5"	5"	5"	5"	5"	5"	5"
8	Height Over Cab (without work-lights)	114"	114"	114"	114"	114"	114"	114"
9	Width Across Platforms	116"	116"	116"	116"	116"	116"	116"
10	Outside Spread of Fork Arms	131½"	131½"	131½"	131½"	131½"	131½"	131½"
11	Wheelbase	90½"	90½"	90½"	90½"	90½"	90½"	90½"
12	Frame Opening	55"	55"	55"	55"	55"	55"	55"
13	Load Centre Distance	12"	15"	18"	21"	24"	24"	24"
14	Overhang Front	6"	6"	6"	6"	6"	6"	6"
15	Track	42"	48"	54"	60"	66"	72"	78"
16	Overhang Back	6"	6"	6"	6"	6"	6"	6"
17	Length From Face of Fork	30"	30"	30"	30"	30"	30"	30"
18	Forward Fork Tilt	3°	3°	3°	3°	3°	3°	3°
19	Backward Fork Tilt	4½°	4½°	4½°	4½°	4½°	4½°	4½°
20	Platform Height With Front Lowered	16½"	16½"	16½"	16½"	16½"	16½"	16½"
21	Platform Length	24"	30"	36"	42"	48"	54"	60"
A	Capacity	10,000 lbs	10,000 lbs	10,000 lbs	10,000 lbs	10,000 lbs	10,000 lbs	10,000 lbs
B	Unladen Weight	19,000 lbs	19,500 lbs	20,000 lbs	20,500 lbs	21,000 lbs	21,500 lbs	22,000 lbs
C	Maximum Ground Speed	7½ mph	7½ mph	7½ mph	7½ mph	7½ mph	7½ mph	7½ mph
D	Gradability	10%	10%	10%	10%	10%	10%	10%
E	3 Ltr GM LPG	65 hp	65 hp	65 hp	65 hp	65 hp	65 hp	65 hp
F	Electric's	12 Volt	12 Volt	12 Volt	12 Volt	12 Volt	12 Volt	12 Volt
G	Fork Section (2" x 6" x)	24"	30"	36"	42"	48"	54"	60"
H	350/150-280 Front Tyre (Solid) x 2	14" / 6"	14" / 6"	14" / 6"	14" / 6"	14" / 6"	14" / 6"	14" / 6"
I	23 x 10 - 12 Rear Tyre (Super Elastic) x 2 (OD/Width)	23" / 10"	23" / 10"	23" / 10"	23" / 10"	23" / 10"	23" / 10"	23" / 10"
J	Standard Colour	Green & Grey	Green & Grey	Green & Grey	Green & Grey	Green & Grey	Green & Grey	Green & Grey

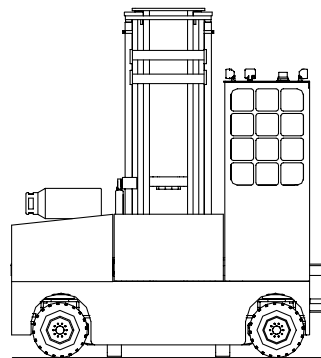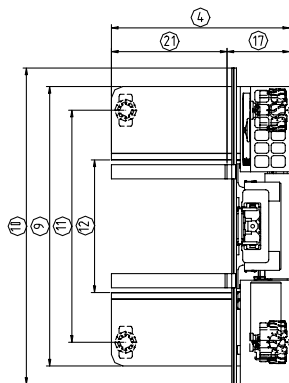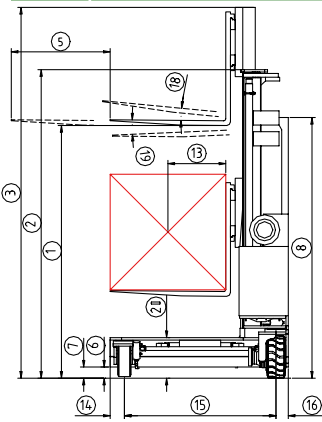

FEATURES INCLUDE:

- Rubber Mounted Overhead Guard
- Load Sensing Steering
- Tilting Chassis +/- 1/2" At Front
- 4 Wheel Steering
- 2 Wheel Hydrostatic Drive
- Hydraulic Oil Cooler


COMBiLiFT Ltd

Co.Monaghan
Ireland
Tel: 011 353 47 80500
Fax: 011 353 47 80501
info@combilift.com

COMBiLiFT USA

303 Concord Street, Greensboro
North Carolina 27406
Toll Free: 1-877 COMBI 56
Tel: 336-378-8884
Fax: 336-378-8842
info@combilift.com

Distributed By

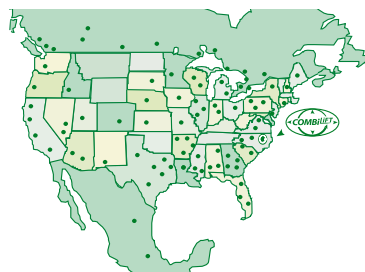

www.COMBiLiFT.COM

Combilift has a policy of continuous product development and reserves the right to alter specifications without prior notice. Specifications and/or dimensions may vary from those illustrated in some countries.